


For Installation of Anesti Post top luminaire.
Model. AN-20595 and AN-20597



Product drawing (dimensions)

CE IP55 IK07 CLASS I

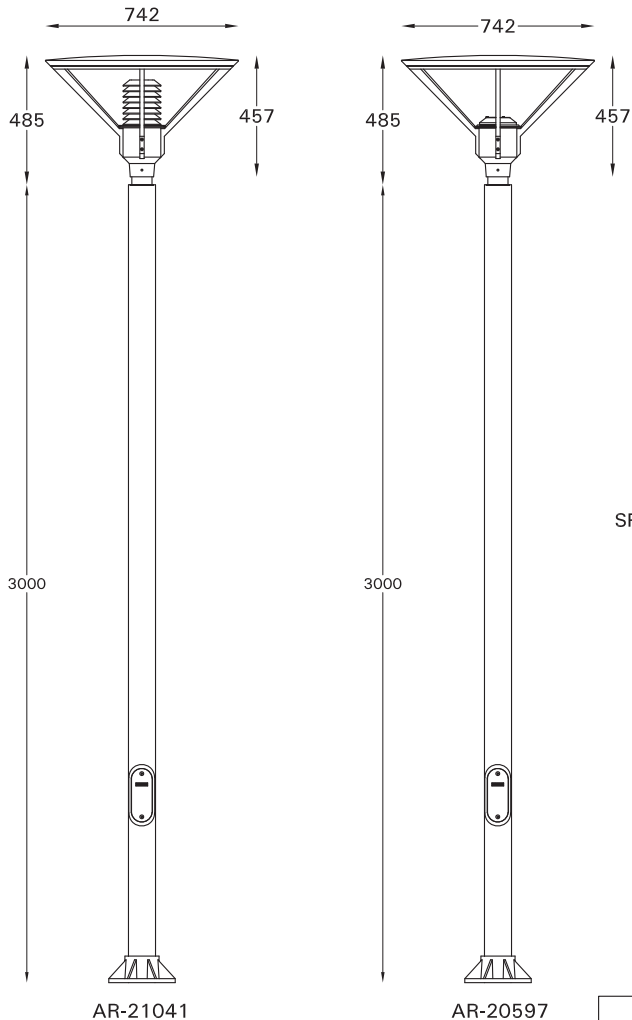


AR-21041


AR-20597




STEEL POST MOUNTING DETAIL




ALUMINIUM POST MOUNTING DETAIL



SPIGOT POST TOP







TOOL



CABLE SIZE : 3x1.0mm²

1

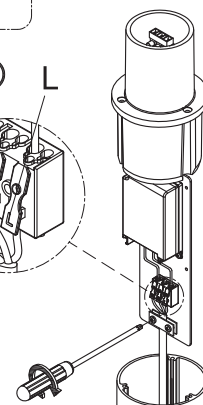

Torque : 2.0Nm.

NOTE : Ensure earthing terminal is connected properly

2

- LIGMAN standard products are supplied with the control gear 220-240V 50/60Hz. The control gear for other voltages and frequencies is available upon request, please consult us for more details.

- LIGMAN luminaires are designed to conform IEC 60598 2-1 standard.

Technical amendments and modifications techniques reserved.

Ligman Lighting

Europe Headquarters

Ligman Europe s.r.o.
VGP Park Usti nad Labem, P 2
Prestanov 113
403 17 Prestanov
Czech Republic
Tel. +420 608 740 504 | sales.cz@ligman.com

Thailand Headquarters

Ligman Lighting Co., Ltd.
17/2 Moo 4, Monthong, Bangnampreaw
Chachoengsao 24150 Thailand
Tel : +66 (2) 7339140
info@ligman.com

Ligman SAS France

7 rue Antoine Becquerel
Centre d'activités Triasis
31140, Launaguet
Tel: +33 5 61 70 24 62
sales.fr@ligman.com

